

DIMENSIONS

Length O.A.	27' 3"	8.31 m
Length W.L.	23' 0"	7.01 m
Beam	8' 9"	2.67 m
Draft	3' 6"	1.06 m
Displacement	5.2 tons	5283 kg
Thames measurement	7 tons	
Ballast keel	2.1 tons	2133 kg

SAILS

Mainsail	193 sq. ft.	18.0 m ²
No. 1 jib	157 sq. ft.	14.6 m ²
No. 3 jib	65 sq. ft.	6.1 m ²
Genoa (extra)	238 sq. ft.	22.2 m ²

ENGINE

15 b.h.p Lister SW2 two cylinder diesel, sea water cooled, 12 volt electric starting, manual reverse gear box. 2:1 reduction gear

TANKS

Fuel: 14 gallons (64 litres)
Fresh water: two 14 gallon interconnected


CONSTRUCTION

to Lloyd's rules for classification
Mouldings by Seaglass Ltd. of Alresford
Weights are for C.S.M. per sq. ft. Resin at 2.75:1

Keel	23 oz.
Fin and tuck	18 oz.
Bottom	13 oz.
Bilge keels	moulded integrally with hull, not ballasted. 14 oz. generally, 20 oz. in root. Stiffened by two web frames, filled with foam and sealed across mouth. 10% oz.
Topsides	9 oz. Mahogany beams moulded in.
Decks and coachroof	Mahogany moulded in.
Stringers	afromosia
Varnished topstrake	oak
Rubbing strakes	afromosia
Footrails and handrails	afromosia
Hatches	afromosia
Coamings	afromosia
Cockpit seats	afromosia
Cockpit joinery	mahogany
Ballast keel	lead casting, bonded and sealed in.

SCALE - FEET

SCALE - FEET

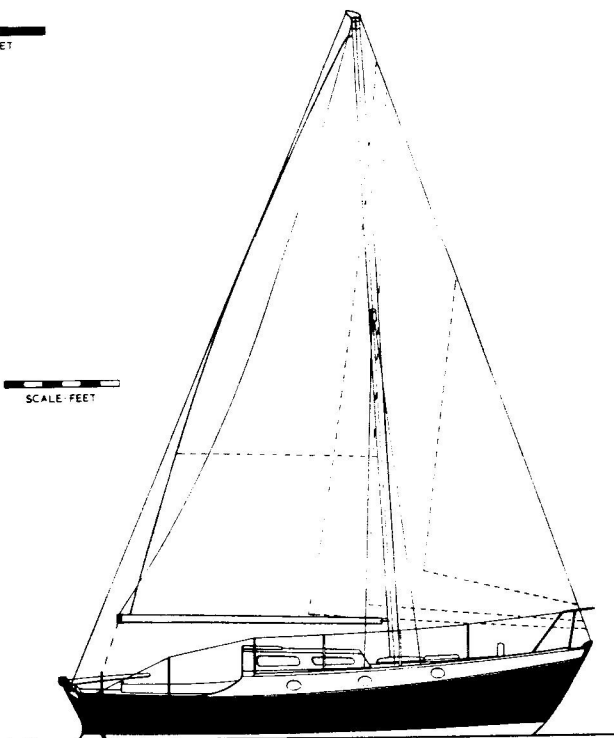

FITTINGS

Galvanised stemhead forestay and chain roller fitting; gunmetal bow fairleads; stainless steel pulpit; stainless steel stanchions; single guardwire in PVC sleeve; mushroom vent over focsle; anchor chocks; samson post; galvanised chain pipe; decklight in forehatch; ventilite over wash compartment; galvanised mast step; bronze shroud plates; handrails on doghouse; five fixed doghouse windows; six fixed oval portlights; mushroom vent over galley; sheet lead track and sliders; two sheet winches; cleats for jib sheets; cleats for mainsheet; Whale Gusher 10 pump for main bilge; Whale Gusher 10 pump and 3 way cock for cockpit bilge; four mooring cleats; boom gallows; sheet horse; fuel filler; ensign socket; stern fairleads; backstay plates. Stainless steel pushpit.

Two 14 gallon fresh water tanks piped to galley and washbasin; whale flipper pump in galley; stainless steel sink; Argyll gas cooker in gimbals; Blake Baby sea toilet and seacocks; plastic washbasin; whale flipper pump; mahogany table with drop leaves; handrails; six electric cabin lights, chart light. Navigation lights; pulpit bi-colour, steaming, stern.

SPARS AND RIGGING

Alloy mast, gold anodised and sound deadened; two halyard winches; fixed gooseneck; tapered silver spruce boom; bronze worm roller reefing gear; stainless steel standing rigging; galvanised flexible steel wire halyards; bronze rigging screws; Terylene and Ulstron cordage; Gibb blocks.

SAILS

Mainsail; no. 1 jib; no. 3 jib; (Genoa is extra).
White Terylene by Gowen; with sail bags, battens and ties.

EQUIPMENT

Four 4" polyether foam mattresses covered in PVC cloth; Calor 10 lb cylinder; fire extinguisher; 12 volt heavy duty battery; 35 lb CQR anchor; 30 fathoms 5/16" galvanised chain; 24 1/2 lb CQR kedge anchor; 20 fathom nylon kedge warp; two 15 fathom Ulstron warps; four plastic fenders; boat hook; cockpit cover.

FINISH

We are well known for this and take a great deal of trouble to give a first class yacht finish.

designed by H.T.ROSSITER A.M.R.I.N.A. built by

PURBROOK ROSSITER

BRIDGE STREET · CHRISTCHURCH · DORSET · ENGLAND · Tel: Christchurch 3250